


AIREX® T10

GM--TDS-113

Premium Surface with High Specific Properties

DATA SHEET 11.2025 - Replaces 03.2023

DESCRIPTION

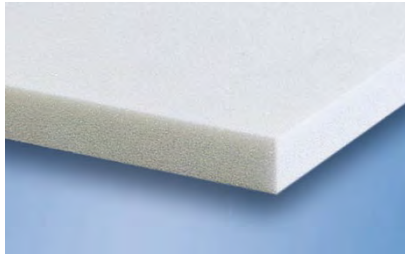

AIREX® T10 is a closed-cell, thermoplastic and recyclable polymer foam with a very homogeneous cell structure, high mechanical properties and an outstanding price / performance ratio.

It has an extraordinary resistance to fatigue, is chemically stable and has negligible water absorption. It is thermally stable during high temperature processing and post curing. T10 is designed for easy use with all resin systems and processing technologies.

AIREX® T10 is ideally suited for high volume applications of lightweight sandwich structures subjected to static and dynamic loads and/or exposed to elevated temperatures during manufacturing.

CHARACTERISTICS

- Very high compression and shear properties
- Outstanding fatigue strength
- Homogeneous cell structure
- Easy to process with all types of resin and lamination processes
- High process temperature up to 150 °C (short peaks up to 180 °C)
- Good adhesion (skin-to-core bond)
- Excellent long term thermal stability, up to 100 °C (212 °F)
- No water absorption
- Recyclable and recycled material
- Highly consistent material properties
- Comprehensive material traceability (machine-readable batch information on each foam sheet)

APPLICATIONS

- **Road:** Structural and semi-structural parts in interior and exterior of cars Sidewalls, floors, skirts/covers of trucks
- **Wind energy:** Blades (shear webs & shells), nacelles
- **Marine:** Hulls, decks, superstructures, bulkheads, stringers, interiors
- **Industrial:** Covers, containers, X-ray tables, sporting goods

PROCESSING*

- Contact molding (hand/spray)
- Vacuum infusion (VARTM)
- Resin injection (RTM)
- Adhesive bonding
- Pre-preg processing
- Compression molding (GMT, SMC)
- Thermoforming

*For details refer to AIREX® Processing Guidelines.

www.3ACcorematerials.com

Europe | Middle East | India | Africa
Airex AG
5643 Sins, Switzerland
T +41 41 789 66 00
corematerials@3AComposites.com

North America | South America
Baltek Inc.
High Point, NC 27261, USA
T +1 336 398 1900
corematerials.americas@3AComposites.com

Asia | Australia | New Zealand
3A Composites (China) Ltd.
201201 Shanghai, China
T +86 21 585 86 006
corematerials.asia@3AComposites.com

MECHANICAL PROPERTIES					
Typical properties for AIREX® T10		Unit (metric)	Value ¹⁾	T10.100	T10.110*
Density	ISO 845	kg/m ³	Average Typ. range	100 99 - 109	110 103 - 117
Compressive strength perpendicular to the plane	ISO 844	N/mm ²	Average Minimum	1.2 0.9	1.6 1.0
Compressive modulus perpendicular to the plane	ISO 844	N/mm ²	Average Minimum	105 90	120 100
Tensile strength perpendicular to the plane	ASTM C297	N/mm ²	Average Minimum	2.0 1.5	2.3 1.8
Tensile modulus perpendicular to the plane	ASTM C297	N/mm ²	Average Minimum	150 125	165 140
Shear strength lengthwise	ISO 1922	N/mm ²	Average Minimum	1.1 0.9	1.15 0.95
Shear strength crosswise	ISO 1922	N/mm ²	Average Minimum	0.8 0.73	0.9 0.78
Shear modulus lengthwise	ISO 1922	N/mm ²	Average Minimum	34 29	38 32
Shear modulus crosswise	ISO 1922	N/mm ²	Average Minimum	17.5 16	22 19
Shear elongation at break	ISO 1922	%	Average Minimum	20 15	20 15
Thermal conductivity at room temperature	ISO 8301	W/m.K	Average	tbd	tbd
Standard sheet	Width	mm ± 5		1005	
	Length ²⁾	mm ± 5		2440	
	Thickness ³⁾	mm ± 0.5		2 - 6, 10, 12, 15, 20, 50	

*T10.110 is not a standard product, availability only per request.

Finishing Options and other dimension upon request.

¹⁾ Minimum values acc. DNV-GL definition; test sample thickness 20 mm

²⁾ Alternative lengths on request

³⁾ Thickness in standardized configurations available, special on request

The data provided gives approximate values for the nominal density and DNV-GL minimum values according to DNV-GL type approval certificate.

The information contained herein is believed to be correct and to correspond to the latest state of scientific and technical knowledge. However, no warranty is made, either expressed or implied, regarding its accuracy or the results to be obtained from the use of such information. No statement is intended or should be construed as a recommendation to infringe any existing patent.

GM--TDS-113

MECHANICAL PROPERTIES					
Typical properties for AIREX® T10		Unit (imperial)	Value ¹⁾	T10.100	T10.110*
Density	ISO 845	lb/ft³	Average Typ. range	6.2 6.2 - 6.8	6.9 6.4 - 7.3
Compressive strength perpendicular to the plane	ISO 844	psi	Average Minimum	174 130	232 145
Compressive modulus perpendicular to the plane	ISO 844	psi	Average Minimum	15'225 13'050	17'410 14'500
Tensile strength perpendicular to the plane	ASTM C297	psi	Average Minimum	280 218	334 261
Tensile modulus perpendicular to the plane	ASTM C297	psi	Average Minimum	21'760 18'130	23'930 20'310
Shear strength lengthwise	ISO 1922	psi	Average Minimum	160 130	167 138
Shear strength crosswise	ISO 1922	psi	Average Minimum	116 106	131 113
Shear modulus lengthwise	ISO 1922	psi	Average Minimum	4'931 4'206	5'511 4'641
Shear modulus crosswise	ISO 1922	psi	Average Minimum	2'538 2'321	3'191 2'756
Shear elongation at break	ISO 1922	%	Average Minimum	20 15	20 15
Thermal conductivity at room temperature	ISO 8301	Btu.in/hr.ft².F	Average	tbd	tbd
Standard sheet	Width	in ± 0.2		39.6	
	Length ²⁾	in ± 0.2		96	
	Thickness ³⁾	in ± 0.02		0.08 - 0.23, 0.4, 0.5, 0.6, 0.8, 2	

*T10.110 is not a standard product, availability only per request.

Finishing Options and other dimension upon request.

¹⁾ Minimum values acc. DNV-GL definition; test sample thickness 20 mm (¾")

²⁾ Alternative lengths on request

³⁾ Thickness in standardized configurations available, special on request

The data provided gives approximate values for the nominal density and DNV-GL minimum values according to DNV-GL type approval certificate.

The information contained herein is believed to be correct and to correspond to the latest state of scientific and technical knowledge. However, no warranty is made, either expressed or implied, regarding its accuracy or the results to be obtained from the use of such information. No statement is intended or should be construed as a recommendation to infringe any existing patent.

GM--TDS-113